

4-Zone RGB+CCT Remote Controller (FUT092) User Instruction

Features

This product adopt world-wide used 2.4GHz frequency, GFSK control method, with the features of low power consumption, long distance transmitting, strong anti-interference and fast communication rate; can control specified Mi-Light smart light with color, color temperature, saturation and brightness changing.


Parameters

Model No.: FUT092
Voltage: 3V(2*AAA battery)
Power Consumption: 6dBm
Standby Power Consumption: 20uA

Transmission Frequency: 2.4GHz
Modulation Method: GFSK
Control Distance: 30m
Size: 138mm*56mm*20mm

Instruction

1. Long press "Master OFF" or "Zone OFF" to night light mode.
2. Touch "Color temperature line" to white light mode and adjust color temperature.
3. Touch "Color Ring" to change the colors.
4. Press "Speed+" to accelerate the dynamic mode speed continuously until to fastest speed.
5. Press "Speed-" to lower the dynamic mode speed continuously until to lowest speed.

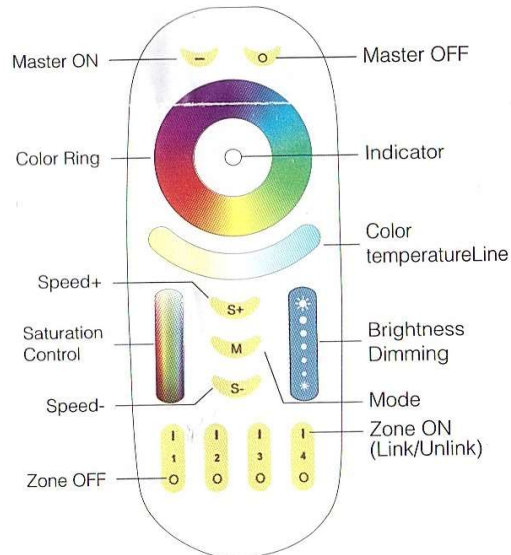


Caution

1. Remote controller only control specified Mi-Light products; not all Mi Light series can work on this remote controller.
2. In the using of the remote, if the indicated lamp blinking quickly, pls change the battery in time.
Pls don't use poor quality battery to avoid the leaking of battery liquid to damage the remote controller.
3. Pls don't use the remote controller on the wide-range metal or strong electromagnetic wave area, otherwise, it will badly affect the controlling distance.

Made in China




Connection diagram

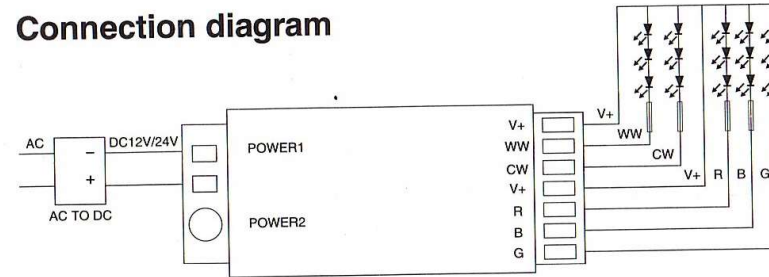


Attention:

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode, otherwise the controller will be broken.
2. Please don't connect wires with power on. Please switch on again only when it is in right connection and no short circuit.
3. Please do not use the controller in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected.

Compatible Remote



B4 / T4



FUT092

NOTE:

Lighting can be working after linking with remote; for more details, pls read the remote instruction.



Made in China




The light can be working after linking with the remote controller.


RGB+CCT LED Strip Controller

Model No.: FUT039


Linking Instructions




1 Switch off the light, after 10 seconds switch on again




2 When the light on, short press any zone of "1" **3 times** within 3 seconds




3 The light blink 3 times slowly means the linking is done successfully.

 If the light not blink slowly, the linking failed, Pls switch off the light again, and follow the above steps again.


Unlinking Instructions




1 Switch off the light, after 10 seconds switch on again



2 When the light on, short press "1" **5 times** within 3 seconds
Unlinking must be the same zone with the Linking



3 The light blinking 10 times quickly, means the unlinking successfully.

 If the light not blink quickly, the unlink failed, pls switch off the light again, and follow the above steps to unlink again.

Product Features



16 Millions of colors to choose



Color temperature 2700-6500K



Dimmable Saturation control



2.4GHz RF, remote control Control distance 30m



Smart phone App control Mi-Light WiFi iBox is needed

Technical Parameters

Model No.: FUT039

Input voltage: DC12V-24V

Output: Max. 6A/Channel

Output connection: Common anode

Total output: Max. 10A

Control distance: 30m

Mode list

- M1. Fire mode.
- M2. Several colors gradual changing.
- M3. Different kelvin changing
- M4. RGB with color temperature gradual changing.
- M5. Seven colors flash.
- M6. Random colors flash.
- M7. Red gradual changing+ flash.
- M8. Green gradual changing+flash.
- M9. Blue gradual changing+flash.

Note: The colors can be dimming under any mode, the speed of any mode can be adjustable.